

## High Performance Acrylic Firestop Sealant (Gun Grade)

### Product Description:

TREMstop Acrylic is a single component, water-based, acrylic firestop sealant. TREMstop Acrylic is an elastomeric, high performance sealant capable of  $\pm 33\%$  movement in a fire-rated joint. TREMstop Acrylic is available in a gun grade and a sprayable grade to help meet any application need.

### Basic Uses:

TREMstop Acrylic is a specially formulated acrylic for firestop applications. These applications include metallic pipe, insulated pipe and construction joints. TREMstop Acrylic is extremely useful for head-of-wall applications where it is the most economical and user-friendly sealant available. TREMstop Acrylic SP (sprayable grade) is very useful for head-of-wall perimeter applications with long joint runs where a sprayable sealant may offer significant labor savings.

### Limitations:

- Not recommended for use in passive fire containment systems not listed or approved by Tremco.
- Do not apply over damp or contaminated surfaces.



### Packaging:

- 10.1 fl. oz. (300ml) cartridges
- 28.7 fl. oz. (850ml) cartridges
- 5 gallon (19 L) pails
- 20 fl. oz. (600ml) sausage pack

### Colors:

Rust Red, White and Limestone.

The sprayable grade is only available in White and Rust Red.

*Special colors available on request.*

### Storage:

One (1) year from date of manufacture when stored in unopened containers in dry areas under 80°F (27°C). Protect from freezing.

### Applicable Test Standards:

- UL 2079
- ASTM E119 (UL 263)
- ASTM E814 (UL 1479)
- ASTM E84
- ASTM E119
- CAN4-S115

### Sprayable:


TREMstop Acrylic SP can be applied using high pressure, airless spray equipment, with a trowel or brush. Pack the flute opening or gap with the required amount and density of mineral wool insulations, flush with edges of the wall assembly. Apply TREMstop Acrylic SP to the required depth utilizing the spray equipment, brush or trowel. Refer to UL detail for system instructions.

## Recommended Spray Equipment Specifications:

- Working Pressure: Min. 2,000 PSI
- Delivery: Min. 1.0 U.S. gal/min. (3.75 L/min.)
- Spray Tip Orifice: 0.023" Larger tip size may be used for higher production rates if the pump can support it.
- Fluid Lines: Min. 3/8" I.D. for up to 50' length
- Wetted parts: All seals and contact surfaces suitable for contact with acrylics.

NOTE: A spray unit capable of spraying block fillers or other heavy architectural coatings should be adequate. **Remove all spray pump filters before use.**

TREMstop Family of Products are Approved by:




Tremco Inc.  
2628 Pearl Road  
Medina, Ohio 44256  
USA

Phone: (330) 220-7072  
Fax: (330) 220-7075  
Toll Free: (800) 209-2404

An **RPM** Company

## Cleaning:

Equipment must be flushed with water at the end of the day. Airless spray equipment operates at extremely high pressures. Protective clothing, gloves and eye protection are required. Follow manufacturer's instructions for safe operation, proper care and cleaning of all spray equipment and accessories.

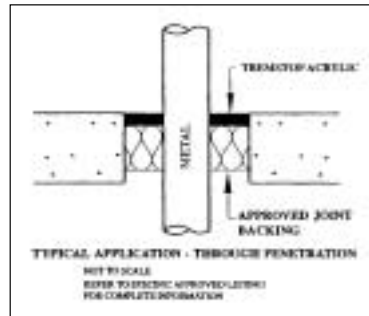

## Warranty:

Tremco warrants its sealants to be free of defects in materials, but makes no warranty as to appearance or color. Since methods of application and on-site conditions are beyond our control and can affect performance, Tremco makes no other warranty, expressed or implied, including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE, with respect to sealants. Tremco's sole obligation shall be, at its option, to replace, or to refund the purchase price of the quantity of the sealant proved to be defective and Tremco shall not be liable for any loss or damage.

**TREMstop**<sup>TM</sup>  
Fire Protection Systems Group

For MSDS and Spec  
Data Sheets, call our 24-hour  
Fax-Back Line: 1-800-551-2806  
or

visit our website:  
[www.tremcofirestop.com](http://www.tremcofirestop.com)

Tremco Ltd.  
215 Wicksteed Ave.  
Toronto, Ontario M4H 1G7  
Canada

Phone: (416) 421-3300  
Fax: (416) 467-2448  
Toll Free: (800) 263-6046

2/03 TSIA